


APP 121.2  
TWR 118.3  
EMER 121.5


ELEV AD 38 FT  
VAR 7° E

**MAZATLAN**  
AEROPUERTO INTL / INTL AIRPORT  
GRAL. RAFAEL BUELNA  
**VOR Z RWY 09**

TA: 18500 FT

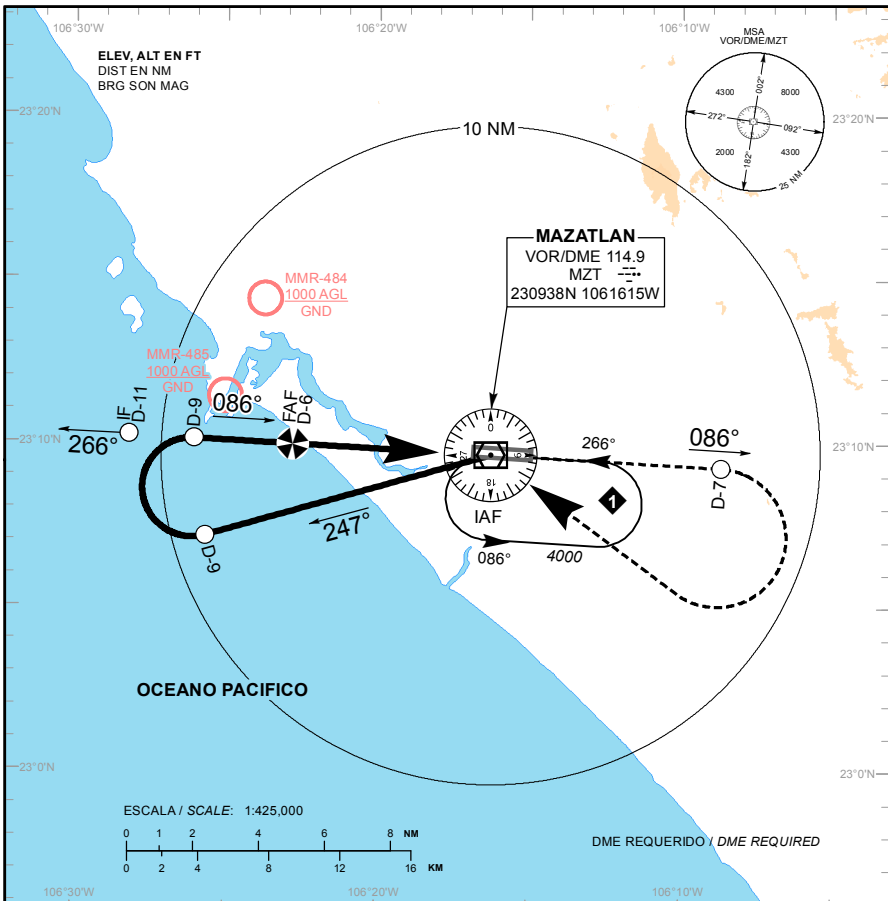

ALTURAS REFERIDAS AL THR RWY09 ELEV 20 FT  
HEIGHTS RELATED TO THR RWY09 ELEV 20 FT

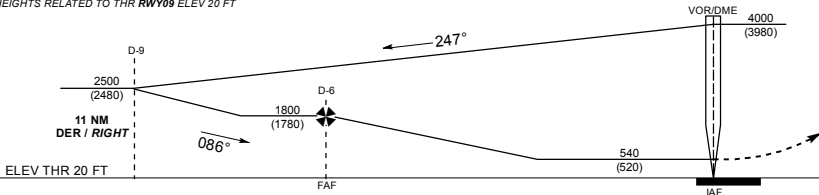

**APROXIMACION FRUSTRADA / MISSED APPROACH**

ASCIENDA EN RADIAL 086° HASTA D-7, EFECTUE VIRAJE DE GOTA A LA DERECHA DENTRO DE 10 NM HACIA EL VOR/DME/MZT HASTA LA ALTITUD MINIMA DE ESPERA.

CLIMB VIA MZT VOR R-086° TO D-7, THEN TURN RIGHT WITHIN 10 NM TO VOR/DME/MZT AT THE MINIMUM HOLDING ALTITUDE.

GRADIENTE DE DESCENSO / RATE OF DESCENT

FAF - THR	VEL GS (KTS)	80	100	120	140	160	180	200
5.62 NM	FT / MIN	411	513	616	719	821	924	1027
5.07%	MIN : SEC	4:30	3:36	3:00	2:34	2:15	2:00	1:48

ALTITUD MINIMA SEGUN DISTANCIA DME/MZT / MINIMUM ALTITUDE ACCORDING TO DISTANCE DME/MZT

NM	6	5	4	3
FT	1800 (1780)	1490 (1470)	1180 (1160)	880 (860)

CAMBIOS: MMR-484, MMR-485

CAT	A	B	C	D
DIRECTO/DIRECT	OCA (OCH) / MDA (MDH) 540 ( 520 ) - 1 ( 1600 M )	540 (520) - 1 1/2 (2400 M)	540 (520) - 1 3/4 (2800 M)	
CIRCULANDO CIRCLING	OCA (OCH) / MDA (MDH) 600 ( 562 ) - 1 ( 1600 M )	640 (602) - 1 3/4 (2800 M)	640 (602) - 2 (3200 M)	