

CARTA DE APROXIMACION
POR INSTRUMENTOS (IAC)

SANTA LUCIA / FELIPE ANGELES INTL (MMSM)



INSTRUMENT APPROACH CHART (IAC)

VOR RWY 22C

| | | | | |
|--------------------------------|----------------------|------------------|-----------------|-----------------|
| TWR 118.25, 118.30, 118.925 | APP 119.0, 128.85 | D-ATIS 127.70 | EMERG 121.50 | AD ELEV 7362 FT |
|--------------------------------|----------------------|------------------|-----------------|-----------------|

APCH FRUSTRADA: ASCIENDA EN RADIAL 226° HASTA D-5. EFECTUE VIRAJE DE GOTA A LA IZQUIERDA HACIA EL VOR/DME/SLM HASTA LA ALTITUD MINIMA DE ESPERA O INSTRUCCIONES DEL ATC.
MISSED APCH: CLIMB VIA SLM VOR R-226° TO D-5, THEN TURN LEFT TO VOR/DME/SLM AT MINIMUM HOLDING ALTITUDE OR ATC INSTRUCTIONS.

RMK: -DME REQUERIDO DME REQUIRED.

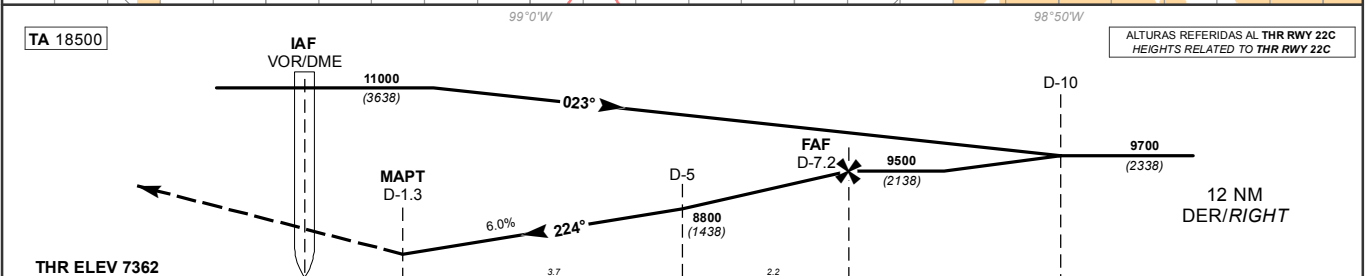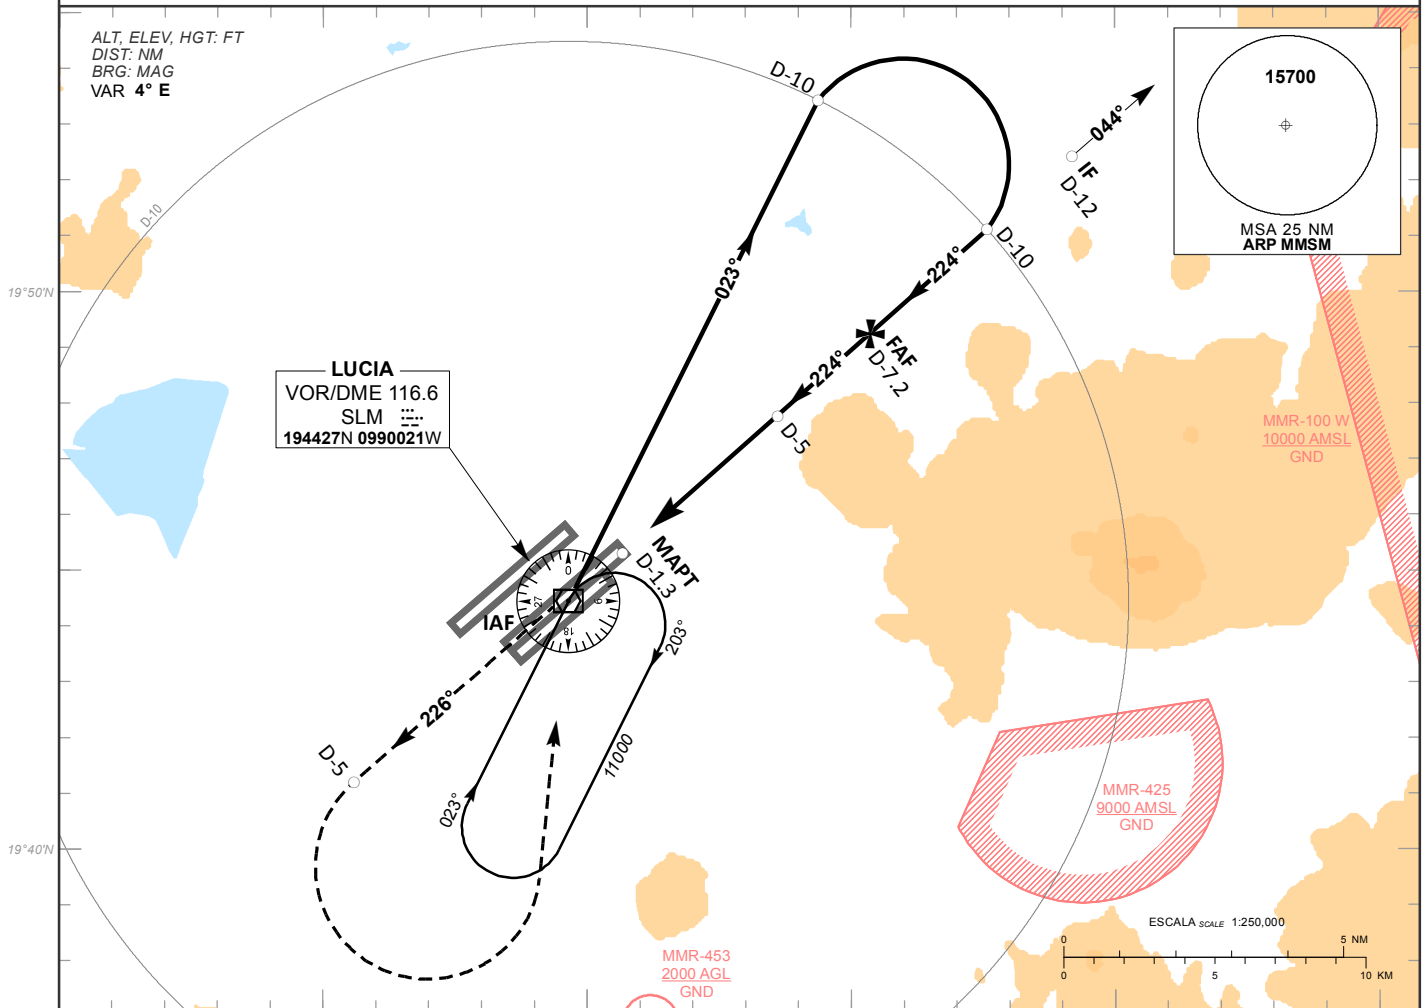

| GRADIENTE DE DESCENSO RATE OF DESCENT | FAF-MAPT 5.9 | | | | | | | 6.0% | | | | | | | ALTITUD MINIMA SEGUN DISTANCIA MINIMUM ALTITUDE ACCORDING TO DISTANCE | NM | 5 | 4 | 3 | - | - | | | | | |
|---------------------------------------|--------------|------|------|------|------|------|------|------|--------|--------|-------|---|---|----|---|----|---|---|---|---|---|--------|--------|-------|---|---|
| | GS (KTS) | 80 | 100 | 120 | 140 | 160 | 180 | 200 | 8800 | 8440 | 8070 | - | - | FT | | | | | | | | 8800 | 8440 | 8070 | - | - |
| | FT / MIN | 485 | 606 | 727 | 849 | 970 | 1091 | 1212 | (1438) | (1078) | (708) | - | - | | | | | | | | | (1438) | (1078) | (708) | - | - |
| MIN : SEC | 2:46 | 2:13 | 1:51 | 1:35 | 1:23 | 1:14 | 1:07 | | | | | | | | | | | | | | | | | | | |

| CAT | DIRECTO STRAIGHT-IN | | CIRCULANDO CIRCLING | |
|-----|----------------------------------|--|---|--|
| | OCA (OCH) / MDA (MDH) 8000 (638) | | CNL SECTOR "S" RWY 04C/22C OCA (OCH) / MDA (MDH) | |
| | 1 (1600 M) | | 8050 (688) - 1 (1600 M) | |
| | 1 3/4 (2800 M) | | 8560 (1198) - 3 (4800 M) | |

CAMBIOS: MMR-453.